



Every Thing In Welding

Seema Weld Products & Services


New no:158, Old no:151, 2nd Floor Broadway Chennai-600108

Cell no 9381032980 , Ph : 25241326, / 25225117, Fax:45002040

Email: md@seemaweld.in, sales@seemaweld.in, seema_weld@airtelmail.in

Visit Our Website For More Information www.seemaweld.in

Dimension

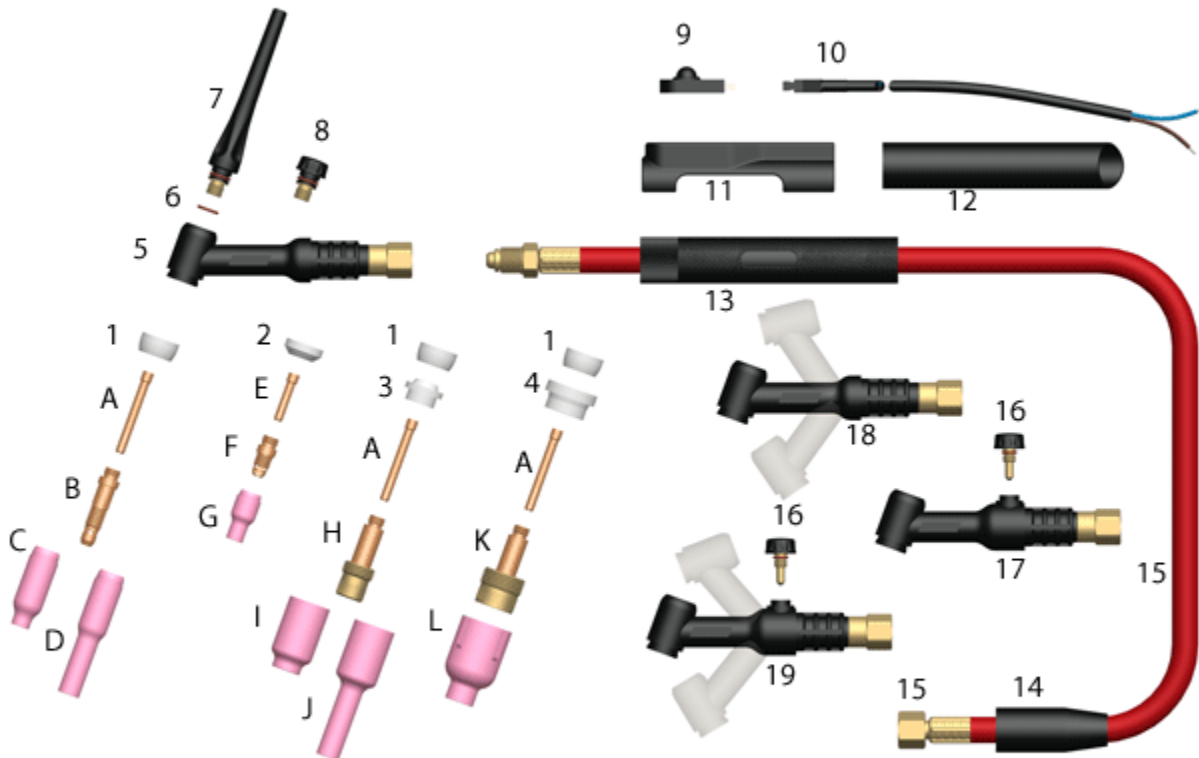




GTAW (TIG) TORCH SAP / GLOBAL HEAD ASSEMBLY


WATER COOLED - 100%DUTY CYCLE

SW24W

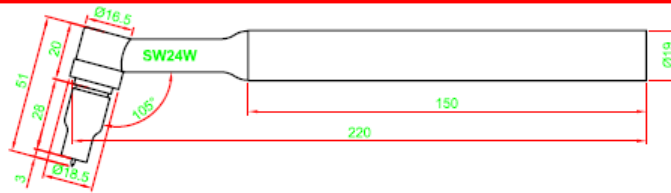


180 AMP D.C. , TE MAX.: 3.2 MM , RD

SW20

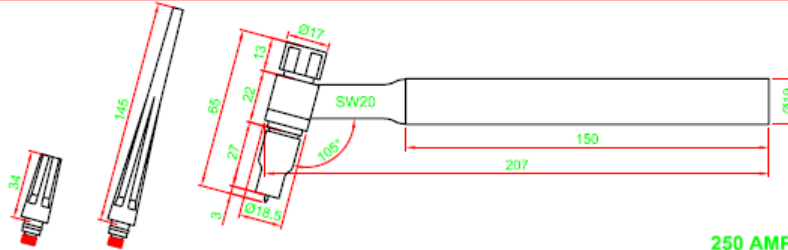

250 AMP D.C. , TE MAX.: 3.2 MM , RD

SW18

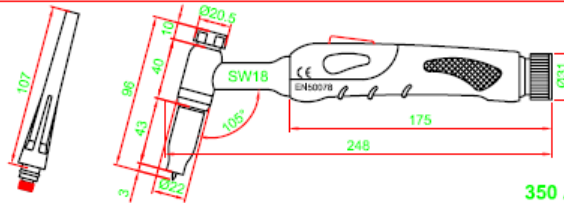

350 AMP D.C. , TE MAX.: 4.0 MM , RD/ET

SW18P




350 AMP D.C. , TE MAX.: 4.0 MM , RD

SW25F




200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

SW12

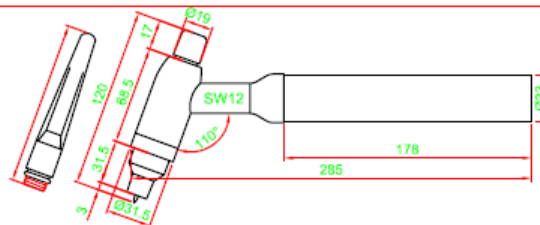

500 AMP D.C. , TE MAX.: 6.4 MM , RD

SW22M

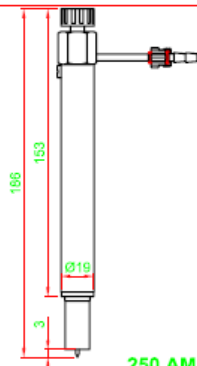

250 AMP D.C. , TE MAX. 3.2 MM , RD

SW27M

500 AMP D.C. , TE MAX. 6.4 MM , RD

- ❖ ALL AIRCOOLED TORCH 60% DUTY CYCLE AT MAX. CAPACITY
- ❖ ALL WATERCOOLED TORCH 100% DUTY CYCLE AT MAX. CAPACITY
- ❖ LENGTH WILL VARY AS PER LENGTH OF ARGON ARC NOZZLE
- ❖ REVERSIBLE HEAD SUITABLE FOR 175 MM TES

RD : ROUND HANDLE
ET : ERGOTIG HANDLE
TE : TIG ELECTRODE


OTHER TORCH
ON REQUEST



GTAW (TIG) TORCH AIR COOLED HEAD ASSEMBLY DIMENSIONS


REVERSIBLE

GC100

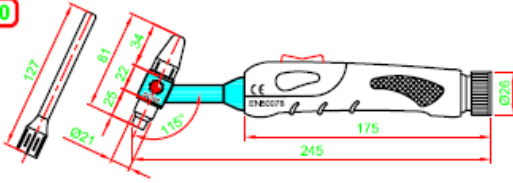


100 AMP D.C. , TE MAX.: 2.4 MM , RD/ET

GC200

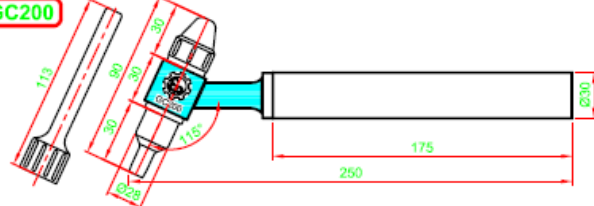


220 AMP D.C. , TE MAX.: 3.2 MM , RD

GC20

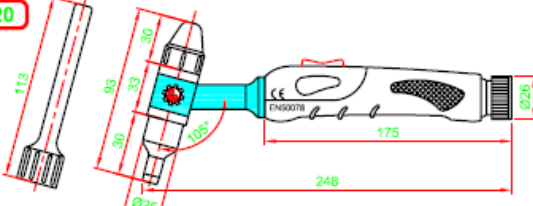

220 AMP D.C. , TE MAX.: 3.2 MM , RD/ET


GC300

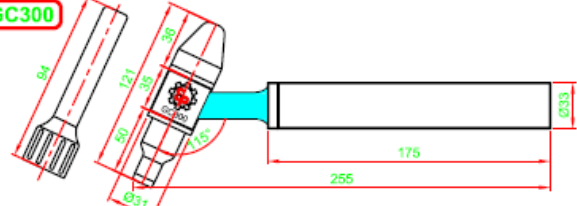

300 AMP D.C. , TE MAX.: 4.0 MM , RD


GOOSE

GC90

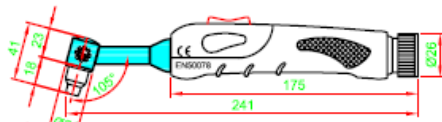

100 AMP D.C. , TE MAX.: 2.4 MM , RD/ET


GC175

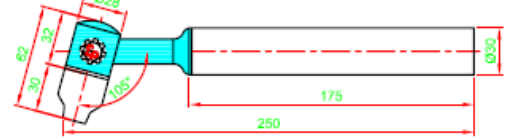

220 AMP D.C. , TE MAX.: 3.2 MM , RD


STRAIGHT

PT48




50 AMP D.C. , TE MAX.: 1.6 MM , RD

GC75




100 AMP D.C. , TE MAX.: 2.4 MM , RD/ET

GC160

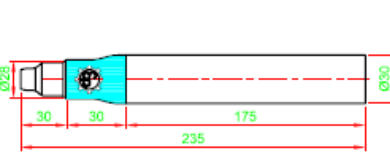

220 AMP D.C. , TE MAX.: 3.2 MM , RD


GC280

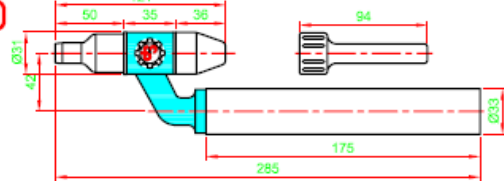

300 AMP D.C. , TE MAX.: 4.0 MM , RD


FLEXIBLE

GC110

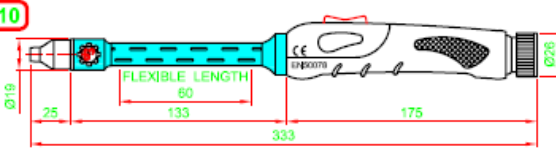


100 AMP D.C. , TE MAX.: 2.4 MM , RD/ET

GC190

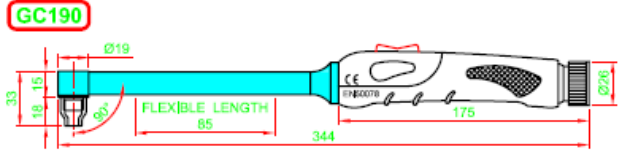


220 AMP D.C. , TE MAX.: 2.4 MM , RD/ET

GC191




220 AMP D.C. , TE MAX.: 2.4 MM , RD/ET

GC225

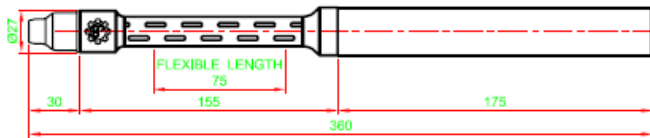


220 AMP D.C. , TE MAX.: 3.2 MM , RD

SA22

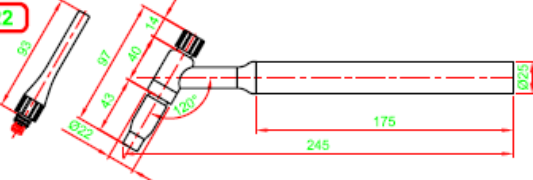

220 AMP D.C. , TE MAX. 3.2 MM , RD/ET

SA22V

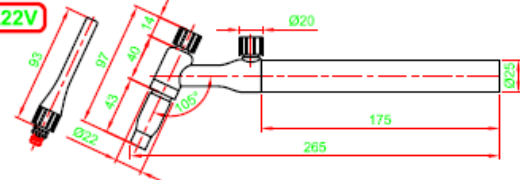


220 AMP D.C. , TE MAX. 3.2 MM , RD/ET



GTAW (TIG) TORCH WATER COOLED HEAD ASSEMBLY DIMENSIONS


REVERSIBLE

WC210

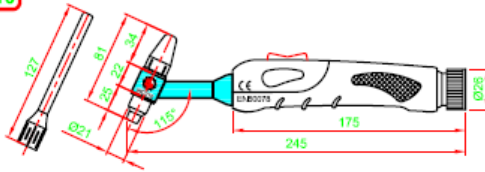


200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

WC400

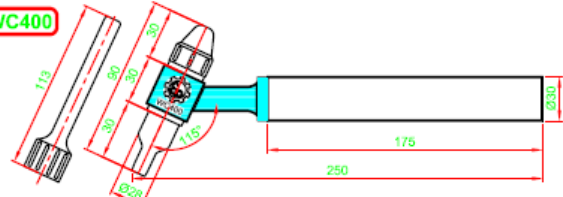


400 AMP D.C. , TE MAX.: 5.0 MM , RD

WC40

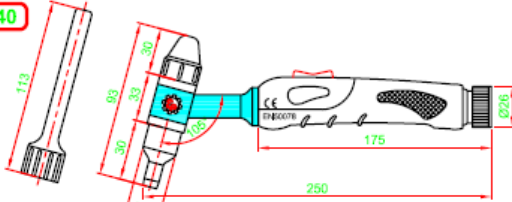

400 AMP D.C. , TE MAX.: 5.0 MM , RD/ET


WC600

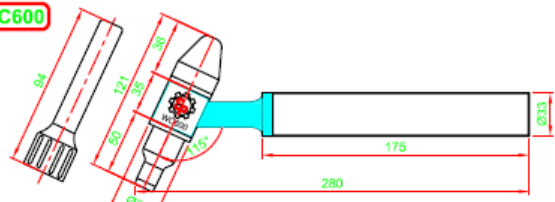

600 AMP D.C. , TE MAX.: 6.4 MM , RD


GOOSE

WC180

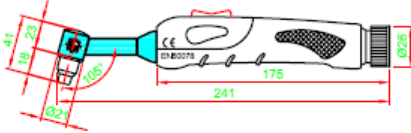

200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET


WC350

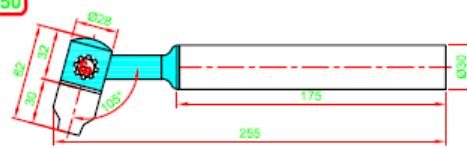

400 AMP D.C. , TE MAX.: 5.0 MM , RD

STRAIGHT

WC150




200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

WC300



400 AMP D.C. , TE MAX.: 5.0 MM , RD


WC550

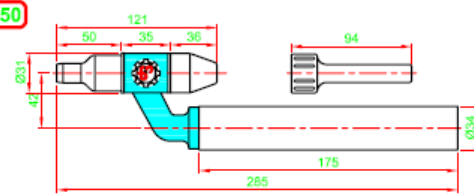

600 AMP D.C. , TE MAX.: 6.4 MM , RD


FLEXIBLE

WC220

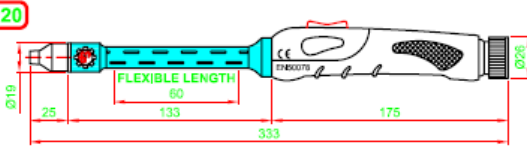


200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

WC390

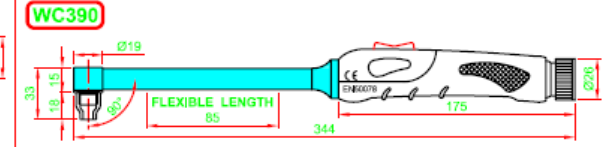

350 AMP D.C. , TE MAX.: 3.2 MM , RD/ET


WC391




220 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

SLEEK FLEXIBLE


WC26



WC410

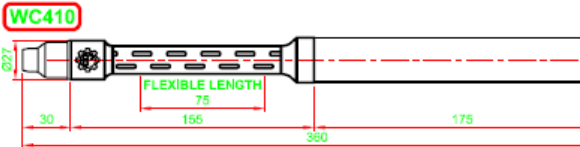


400 AMP D.C. , TE MAX.: 5.0 MM , RD

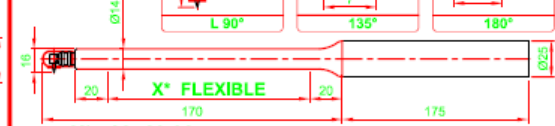


X° - 30; 60;90
220 AMP D.C. ,TE MAX.: 2.4 MM ,RD/ET

SW35

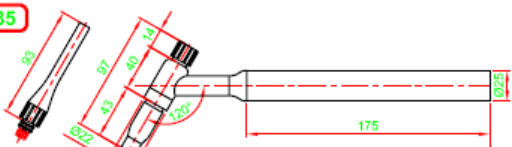

350 AMP D.C. , TE MAX. 4.0 MM , RD/ET

SW35V

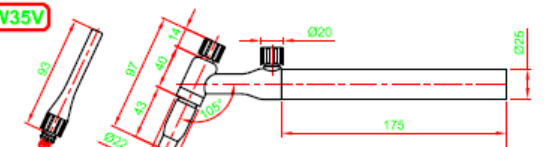

350 AMP D.C. , TE MAX. 4.0 MM , RD/ET

- ❖ ALL AIRCOOLED TORCH 60% DUTY CYCLE AT MAX. CAPACITY
- ❖ ALL WATERCOOLED TORCH 100% DUTY CYCLE AT MAX. CAPACITY
- ❖ LENGTH WILL VARY AS PER LENGTH OF ARGON ARC NOZZLE
- ❖ REVERSIBLE HEAD SUITABLE FOR 175 MM TES

RD : ROUND HANDLE
ET : ERGOTIG HANDLE
TE : TIG ELECTRODE


OTHER TORCH
ON REQUEST



GTAW (TIG) TORCH SAP / GLOBAL HEAD ASSEMBLY


AIR COOLED - 60% DUTY CYCLE

SA24G

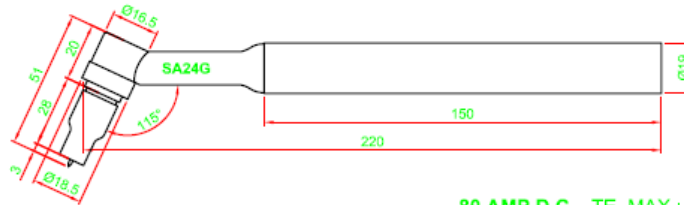


80 AMP D.C. , TE MAX.: 2.4 MM , RD

SA9

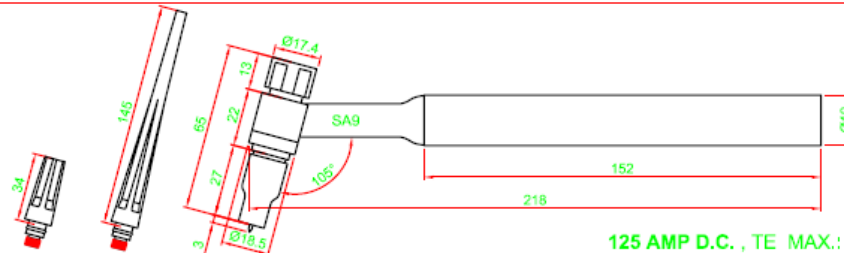


125 AMP D.C. , TE MAX.: 2.4 MM , RD

SA9V

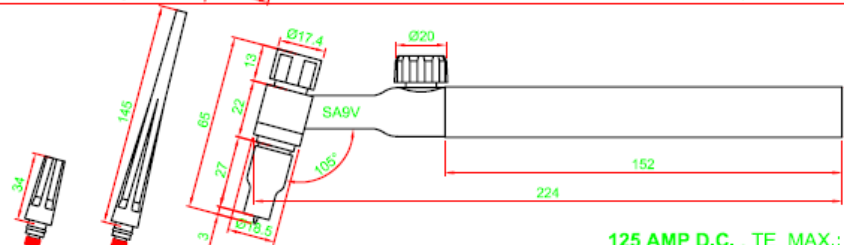


125 AMP D.C. , TE MAX.: 2.4 MM , RD

SA26

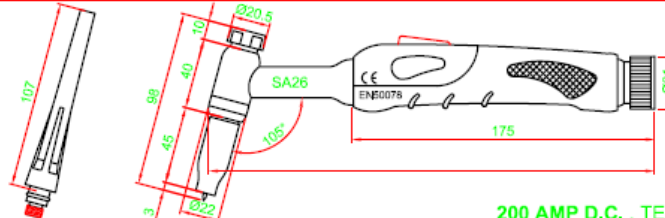

200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

SA26V

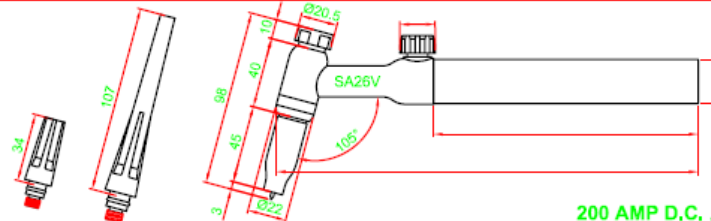

200 AMP D.C. , TE MAX.: 3.2 MM , RD/ET

SA9P



125 AMP D.C. , TE MAX.: 2.4 MM , RD

SA26P



200 AMP D.C. , TE MAX.: 3.2 MM , RD